

we care 

primus

laundry equipment

## High Spin Industrial Washer Extractor

FS 13




### FEATURES

- Freestanding, high spin
- Front and top panels from stainless steel
- Stainless steel drum and tub
- Easy to use (EC) microprocessor
- Extra large door opening (Ø41 cm) for easy loading and unloading
- Large drain valve (Ø76 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Frequency controlled motor
- PowerWash® perforated lifting ribs: more mechanical action, lower water consumption
- SuperEco washing programmes - significantly reduces water and electricity consumption

### OPTIONS

- Stainless steel cabinet (AISI 304)
- Graphitronic® - new graphic display with almost unlimited possibilities as:
  - Communication interface enabling remote service
  - Multilingual microprocessor
  - Freely programmable
- Liquid soap connections
- Liquid soap pumps
- Coin operated timer
- SoftWash® version (wet cleaning)
- Water recovery kit
- Trace-Tech® traceability software and networking system



POWERWASH®


supereco

liqui-mix®

TRACE-TECH®

| TYPE                          |                | FS 13  |
|-------------------------------|----------------|--|
| <b>CAPACITY</b>               |                |  |
| Drum volume                   | l              | 131  |
| Capacity                      | kg/lb          | 13/30  |
| Drum diameter                 | mm             | Ø650   |
| <b>DRUM SPEED</b>             |                |  |
| Wash speed                    | rpm            | 45   |
| Spin speed                    | rpm            | 1000   |
| G-factor                      |                | 360  |
| <b>PROGRAMMER</b>             |                |  |
| EC microprocessor             |                | standard   |
| Graphitronic® microprocessor  |                | +  |
| Coin meter (or tokens)        |                | +  |
| <b>CABINET</b>                |                |  |
| Coloured side panels          |                | standard   |
| Stainless steel AISI 304      |                | +  |
| <b>CONNECTION</b>             |                |  |
|                               |                | Freestanding (4xM10)   |
| <b>HEATING</b>                |                |  |
| 100% hot water                | ° C/° F        | 90/194   |
| 100% electrical               | kW             | 6-9-12   |
| Hot water and electrical      |                |  |
| Additional heating            | kW             | 6-9-12   |
| Steam additional heating      | bar            | 1-3  |
| Steam high pressure           | bar            | 3-8  |
| <b>CONNECTION</b>             |                |  |
| Electrical                    |                | 1x220-240V 50/60Hz<br>3x220-240V 50/60Hz<br>3x380-415V+N 50Hz<br>3x380-415V 50Hz |
| Water inlet                   | inch           | G 3/4"   |
| Steam inlet                   | inch           | G 1/2"   |
| <b>DIMENSIONS HxWxD</b>       | mm             | 1295x835x930   |
| <b>TRANSPORT DATA</b>         |                |  |
| Gross weight                  |                |  |
| Packing                       | kg             | 365  |
| Net weight                    | kg             | 345  |
| Volume (packed)               |                |  |
| Foil packing                  | m <sup>3</sup> | 1,16   |
| Foil packing HxWxD            | mm             | 1425x855x950   |
| <b>WATER CONSUMPTION</b>      |                |  |
| Cold and hot water per cycle* | l              | 85 + 21  |

+ = Available, Standard = Standard execution, \* Tested in accordance of EN 604 56 norm  
The data concerning dimensions of machines include all extended parts

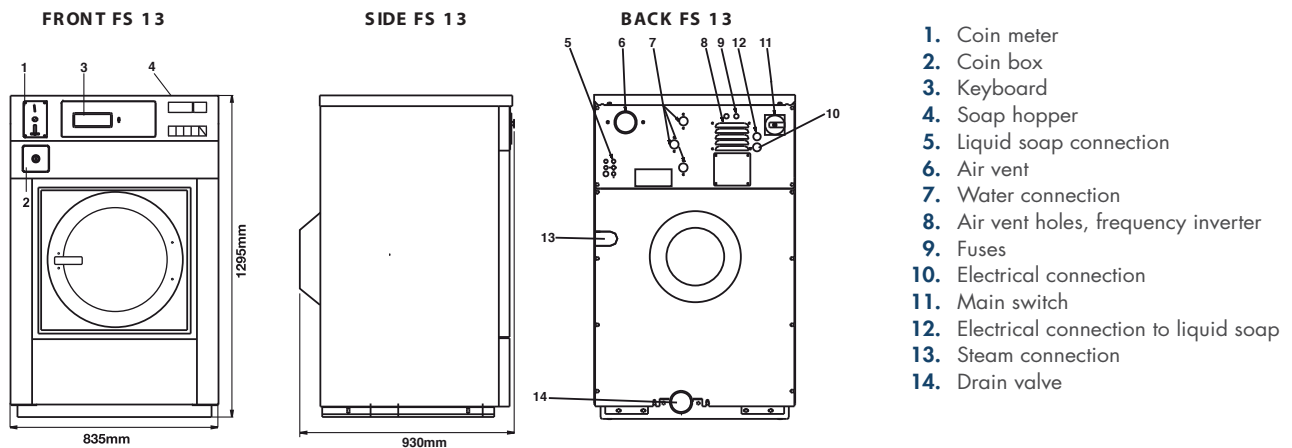

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

ISO 9001  
ISO 14001  
BUREAU VERITAS  
Certification

