

FLM FAIRFIELD LAUNDRY MACHINERY CORP.

the NEW Improved
"WET-TYPE"
Lint Collector



Designed
for the
Laundry, Hotel
Health Care
and Textile
Industries.

FLM has taken the proven concept of *wet type* filtration and developed a new, improved, more maintenance-free lint collector.

The FLM lint collector features:

- Greater Capacity - CFM ranges from 9000 to 34,000 CFM.
- All Stainless Steel Construction - Including Reservoir Tank.
- Strategically located access door - Locking Type - for ease of maintenance and leak free service.
- Use of latest in plastics technology for water spray equipment. — Spray Header Assembly - Piping - to guarantee a lifetime of service without replacement due to rust.
- Improved water spray pattern to insure greater Lint Entrapment.
- Non-clogging spray nozzles - minimum maintenance required.

All these additional features are provided at a LOWER COST than any comparable unit.

The FLM unit is designed for a life-time of service. The main advantages for this lint collector are:

1. **SAFETY** - *Wet-Type* filtration eliminates the accumulation of dry, highly combustible lint inside ductwork and the surrounding laundry area.
2. **EFFICIENCY** - This unit has no screens or filter media, which will clog and cause back-pressure on tumblers or drying equipment.
3. **COST SAVINGS** - The FLM unit is designed to offer a lifetime of service - at the lowest cost available. The cost for an FLM unit will be paid for by the improved efficiency in the drying operation within a short period.
4. **FLEXIBILITY** - The FLM unit is available in capacities from 9000 to 39,000 CFM. One unit will handle any combination of drying tumblers and ironers totalling up to 39,000 CFM.

The FLM unit can be installed anywhere - inside - outside - roof mounted or ceiling suspended.

Contact our office for details.

SPECIFICATIONS FOR FLM "WET-TYPE" COLLECTOR


MODEL	C.F.M.	PUMP H.P.	FAN H.P.	FLOOR SPACE REQUIRED	REAR OUTLET MIN. CEILING HEIGHT REQ'D.	TOP OUTLET MIN. CEILING HEIGHT REQ'D.	SHIPPING WEIGHT
SM-9	9000	1.5	2	78x72	111	148	1000 lbs.
SM-13	13000	1.5	3	78x72	111	141	1100 lbs.
SM-20	20000	1.5	5	97x80	111	139	1500 lbs.
SM-23	23000	1.5	5	97x80	111	143	1500 lbs.
SM-29	29000	1.5	7½	97x80	111	143	1500 lbs.
SM-34	34000	1.5	10	97x80	111	143	1700 lbs.
SM-39	39000	1.5	10	116x80	118	150	2000 lbs.

All Dimensions In Inches.

The manufacturer reserves the right to change specifications without notice.



ENERGY SAVING - Coaxial Systems

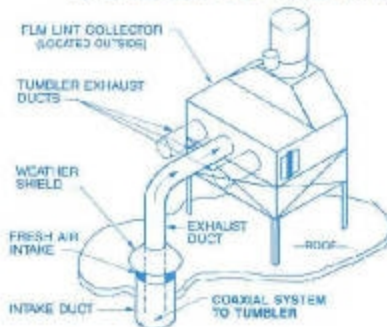

Inverter Control Systems for multiple tumbler applications are available. Contact our office for details.